





Technical Data

Application Category	Linear Lights
Wattage	18 W/MTR , 27W/MTR, 36W/MTR.
Source Lumen	2340lm , 3510lm, 4680lm
Ingress Protection	IP40
Material	Aluminium Extrusion.
Coatings	"Duracoat" - Double Protection Anodising And Powder Coating.
Light Source	Bridgelux
Life Span	50000 hrs*
Screws	Stainless steel
Power Supply	Integral
Gasket	N/A
Glass	Diffuser Opal / Prismatic.
Cable Gland	N/A
Power Cable	1.5 Mtr.
Dimension	73 mm Height*44 mmWidth*1130mm Length
Gross Weight	-

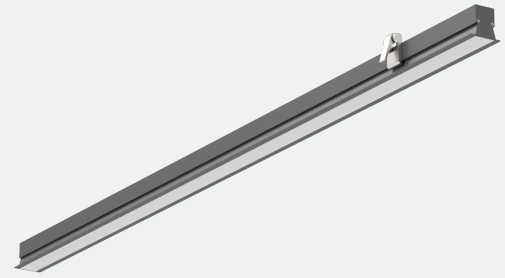

Features

- LED Chip High Quality Bridgelux SMD LED's Give Very High Lumen Output.
- Deep Recessed Glare Free Lighting.
- Various Connection Accessories: "T" Type, "+" Type, "L" Type And "_" Type Etc.
- Standard Length Is 1130mm (Other Length Needs To Customize).
- Seamless Connection By Flexible High Quality PC Diffuser, Enlight Any Space Without Interruptions Uoto 25 Meter per Roll.

Family	Type	Code	Wattage	CRI	Optics	CCT	Fixture Finish	Supply	Accessories
ALULINE	CSR	4795	18-18W 27-27W 36-36W	8 - 80 CRI 9 - 90 CRI	120 Degree	27 - 2700K 30- 3000K 40- 4000K 57- 5700K	B-Black W-White G-Graphite Grey C - Corton G - Dark leaf Green S - Smooth Silver	Integrated Driver	-

Code Example :- ALULINE_CSR_R4795_18_8_120_27_B