



Technical Data

Application Category	Linear Lights
Wattage	18 W/MTR , 27W/MTR, 36W/MTR.
Source Lumen	2340lm , 3510lm, 4680lm
Ingress Protection	IP40
Material	Aluminium Extrusion.
Coatings	"Duracoat" - Double Protection Anodising And Powder Coating.
Light Source	Low Power Led.
Life Span	35000 hrs.*
Screws	Stainless steel
Power Supply	Integral 230v
Gasket	N/A
Glass	Diffuser Opal / Prismatic.
Cable Gland	N/A
Power Cable	1.5 Mtr.
Dimension	95 mm Height*47 mm Width*1130mm
Gross Weight	-

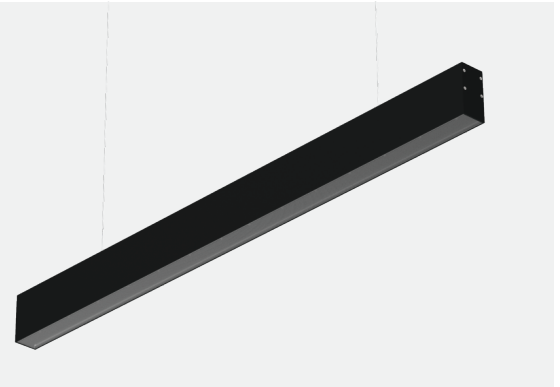


Features

- LED Chip High Quality Bridgelux SMD LED's Give Very High Lumen Output.
- Two Kinds Of Installation: Pendant or Surface Mounted.
- Various Connection Accessories: "T" Type, "+" Type, "L" Type And "_" Type Etc.
- Standard Length Is 1130mm (Other Length Needs To Customize).
- Well-Distributed Light Spot And UGR <19.
- Two Kinds Of Diffuser: Prismatic or Opal.
- Seamless Connection By Flexible High Quality PC Diffuser, Enlight Any Space Without Interruptions Upto 25 Meter per Roll.
- Easy Maintainance: Front Opening System, No Need To Remove Fixture.


Family	Type	Code	Wattage	CRI	Optics	CCT	Fixture Finish	Supply	Accessories
ALULINE	CSD	4795	18-18W 27-27W 36-36W	8 - 80 CRI 9 - 90 CRI	120 Degree	27 - 2700K 30- 3000K 40- 4000K 57- 5700K	B-Black W-White G-Graphite Grey C - Corton G - Dark leaf Green S - Smooth Silver	Integrated Driver	-

Code Example :- ALULINE_CSD_4795_18_8_120_27_B


Accessories



X Joint




Surface Fixing Clip



Fixing Clip



Clutch Wire



Profile Joiner