




Technical Data

| | |
|----------------------|--|
| Application Category | Inground |
| Wattage | 12w |
| Source Lumen | 1440 lm |
| Ingress Protection | IP67 |
| Material | Excellent Corrosion Resistance Low Copper, Solid Anodized Aluminium Body and 316 Stainless Steel Ring. |
| Coatings | "Coro safe" Anodized Aluminium and SS Faceplate. |
| Light Source | 6 x High Power Led |
| Life Span | 50000 hrs.* |
| Screws | Stainless Steel. |
| Power Supply | Remote - CC Driver - (18V, 700mA). |
| Gasket | High Grade Long Lasting Silicon Gasket. |
| Glass | Extra Clear Impact Resistant Toughened Glass. |
| Cable Gland | Double Nickel-Plated German Brass Cable Gland M12, High Quality Silicon Gourmet. |
| Power Cable | 300mm All-Weather Neoprene Power Cable Included. |
| Dimension | 140 mm Dia 82 mm Height, 123 mm Cut Out. |
| Gross Weight | - |

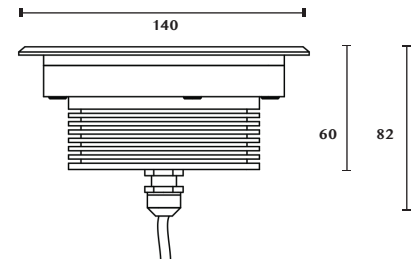

Features

- Excellent Corrosion Resistant Low Copper Solid Aluminium Body.
- SS316 Faceplate.
- Extra Safety Impact Resistant Toughened Glass.
- Extra Clear Glass To Increase Efficiency Of The Fixture.
- Silicon mould rubber gasket
- High Grade Brass Nickel Plated German Gland.
- High Grade Neoprene Silicon Based Italian Cable To Withstand Any Weather Conditions .
- Best In Class Thermal Management.
- High Efficiency Optical System.
- Multiple Accessories Support
- Cree LED 50000* hrs Life
- Recessed Housing Made Of GFR Polymer.
- "Coro Safe" High Grade Anodizing.
- "Capillary Protect System" Anti-Capillary System To Protect Any Water Ingress From Cable Joints.
- "Long Life" Thermal Management.


| Family | Type | Code | Wattage | CRI | Optics | CCT | Fixture Finish | Supply | Accessories |
|--------|------|------|----------|--------------------------|--|--------------------------------------|---------------------|--------------------|---|
| Terra | ING | 140 | 12 - 12w | 8 - 80 CRI 9 - 90 CRI | SP - 10° M - 24° W - 40° WFL - 60° DF - Diffused | 27 - 2700K 30- 3000K 40- 4000K | AS- Anodized silver | CC - Remote driver | HL-77-Hexcell Louvre (one accessory only) |

Code Example :- Terra_ING_140_12_8_SP_27_AS_CC_HL-77

Accessories



HL-77
(Hexcell Louvre)



RH-140-S
(Recessed Housing)



Meanwell APC
16-700, IP42