



### Technical Data

<b>Application Category</b>	Linear Lights
<b>Wattage</b>	18 W/MTR , 27W/MTR, 36W/MTR.
<b>Source Lumen</b>	2340lm , 3510lm, 4680lm
<b>Ingress Protection</b>	IP40
<b>Material</b>	Aluminium Extrusion.
<b>Coatings</b>	"Duracoat" - Double Protection Anodising And Powder Coating.
<b>Light Source</b>	Bridgelux
<b>Life Span</b>	50000 hrs*
<b>Screws</b>	Stainless steel
<b>Power Supply</b>	Integral
<b>Gasket</b>	N/A
<b>Glass</b>	Diffuser Opal / Prismatic.
<b>Cable Gland</b>	N/A
<b>Power Cable</b>	1.5 Mtr.
<b>Dimension</b>	95 mm Height*79 mmWidth*1130mm Length
<b>Gross Weight</b>	-

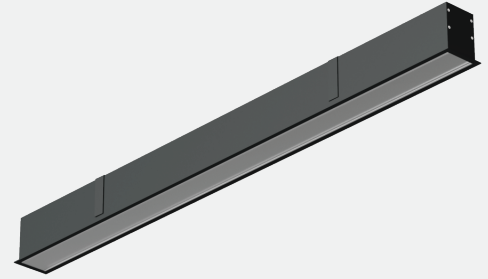


### Features

- LED Chip High Quality Bridgelux SMD LED's Give Very High Lumen Output.
- Recessed Installation.
- Two Kinds Of Installation: Pendant or Surface Mounted.
- Various Connection Accessories: "T" Type, "+" Type, "L" Type And "-" Type Etc.
- Standard Length Is 1130mm (Other Length Needs To Customize).
- Well-Distributed Light Spot And UGR <19.
- Seamless Connection By Flexible High Quality PC Diffuser, Enlight Any Space Without Interruptions Upto 25 Meter per Roll.
- Easy Maintainance: Front Opening System, No Need To Remove Fixture.


Family	Type	Code	Wattage	CRI	Optics	CCT	Fixture Finish	Supply	Accessories
ALULINE	CSR	7995	18-18W 27-27W 36-36W	8 - 80 CRI 9 - 90 CRI	120 Degree	27 - 2700K 30- 3000K 40- 4000K 57- 5700K	B-Black W-White G-Graphite Grey C - Corton G - Dark leaf Green S - Smooth Silver	Integrated Driver	-

Code Example :- [ALULINE\\_CSR\\_R7995\\_18\\_8\\_120\\_27\\_B\\_CC](#)

### Accessories



X Joint



Profile Joiner