


DISK

DISK 2



Technical Data

Application Category	Bollard
Wattage	22W
Source Lumen	2520lm
Ingress Protection	IP65
Material	GI Pipe And Solid Aluminium Parts.
Coatings	"Weather Protect" High Grade Pure Polyester, Outdoor Powder Coating.
Light Source	2 x COB LED
Life Span	50000 hrs*
Screws	Stainless steel
Power Supply	Integral 230vAC, 24vDC
Gasket	N/A
Glass	N/A
Cable Gland	N/A
Power Cable	Cable Not Included.
Dimension	Width - 340 mm* Base - 130mm, Height - 350mm / 600mm / 900mm
Gross Weight	-

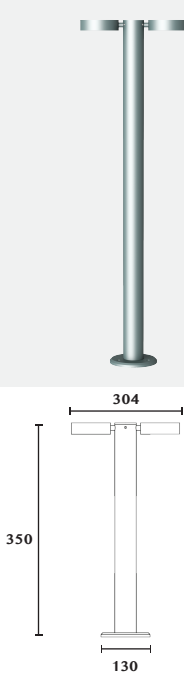

Features

- Solid Aluminium Body.
- High Efficiency Optical System.
- "Weatherprotect" Outdoor Rated Powder Coating.
- "Long Life" Thermal Management.

CV Benefits

- (24 V - Low Voltage)
- Maximum Driver Distance Option. (Long Distance Remote Driver Location)
- Easy Maintenance, Common Driver For Many Fixtures.
- "Human Safe Design" Low Voltage Across Landscape.

Family	Type	Code	Wattage	CRI	Optics	CCT	Fixture Finish	Supply	Accessories
DISK	BO	35-350mm ht. 60-600mm ht. 90-900mm ht.	22 - 11w + 11w	8 - 80 CRI	90 - 90° T1-110 x 160°(Eliptical) "T2-110 x 160° (Forward Through)" "T3-75 x 160° (Forward Through)"	30- 3000K 40- 4000K	G-Graphite Grey B-Black W-White C - Corton G - Dark leaf Green	230 - 230vAC 24-24vDC	-

Code Example :- DISK_2_BO_35_22_8_120_30_G_AC

Accessories



Foundation Kit
GPR-130/JB3-8x150