




Technical Data

| | |
|----------------------|--|
| Application Category | Post Top |
| Wattage | 60w |
| Source Lumen | 6480LM |
| Ingress Protection | IP65 |
| Material | Square GI Pipe And Aluminium Parts. |
| Coatings | "Weather Protect" High Grade Pure Polyester, Outdoor Powder Coating. |
| Light Source | SMD LED |
| Life Span | 50000 hrs* |
| Screws | Stainless steel |
| Power Supply | Integral 230vAC |
| Gasket | N/A |
| Glass | Extra Clear Impact Resistant Toughened Glass. |
| Cable Gland | N/A |
| Power Cable | Cable Not Included. |
| Dimension | Width - 450/1000 mm* Base - 300mm, Height - 4000mm |
| Gross Weight | - |

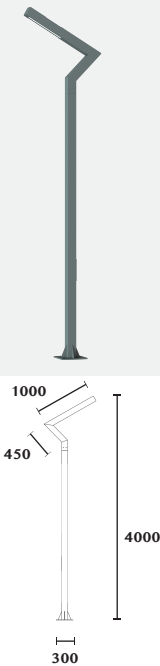


Features

- High Efficiency Optical System
- Extra Clear Glass To Increase Efficiency Of The Fixture..
- "Weather Protect" Outdoor Rated Powder Coating.
- "Long Life" Thermal Management.

| Family | Type | Code | Wattage | CRI | Optics | CCT | Fixture Finish | Supply | Accessories |
|--------|------|---------------|----------|------------|---|------------------------|--|------------|-------------|
| ZIGZAG | PT | 40-4000mm ht. | 60 - 60w | 8 - 80 CRI | T1 - 148X107° T2 - 158X100° T3 - 160X130° | 30- 3000K 40- 4000K | G-Graphite Grey B-Black W-White C - Corton G - Dark leaf Green | 230-230vAC | - |

Code Example :- ZIGZAG_PT_40_60_8_T1_30_G-AC

Accessories



Foundation Kit
GPSQ-300/JB4-16x300